


SPECIFICATION

Furnish and install roof vent flashing with 25 mil. aluminum base, fitted with elastomer collar. Unit shall be Water-Tite item number checked below as manufactured by IPS Corporation, as per corresponding dimensional characteristics, or equivalent. **(Do not use Petroleum based mastics, sealing compounds, or paints on collar portion of all flashings, on all hardbase, flexible, or rain collars.)**

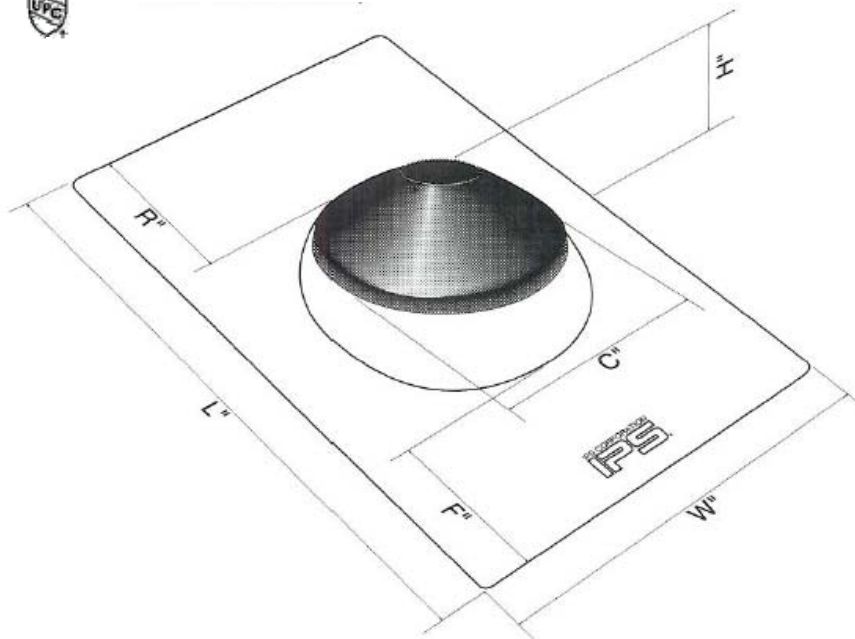

Roof Vent Flashing Dimensional Characteristics

☒	Product Code #	Model	Vent Size	Dim. W	Dim. L	Dim. R	Dim. F	Dim. C	Dim. H
	81900	AB 1	1-1/4" - 1-1/2"	8-3/4"	12-1/2"	3-1/2"	2-3/8"	4-1/4"	2-1/4"
	81905	AB 2	2"	8-3/4"	12-1/2"	3-1/2"	2-3/8"	4-1/4"	2-1/4"
	81910	AB 3	3"	10-3/4"	14-1/2"	2-5/8"	2-3/8"	5-1/2"	2"
	81915	AB 4	4"	12"	16"	3-3/4"	2-3/4"	6-1/2"	2-1/8"
	81916	AB 5	1/2", 3/4", 1"	8-3/4"	12-1/2"	3-1/2"	2-3/8"	4-1/4"	2-1/4"
	81920	AB 118	1-1/4" - 1-1/2"	18"	18"	6-1/4"	5-7/8"	4-1/4"	2-1/4"
	81925	AB 218	2"	18"	18"	6-1/4"	5-7/8"	4-1/4"	2-1/4"
	81930	AB 318	3"	18"	18"	5-3/8"	5-1/8"	5-1/2"	2"
	81935	AB 418	4"	18"	18"	4-3/4"	3-3/4"	6-1/2"	2-1/8"
	81937	AB 518	1/2", 3/4", 1"	18"	18"	6-1/4"	5-7/8"	4-1/4"	2-1/4"